


EAC

Thermostatischer Wassermischer Thermostatic Mixing Valve

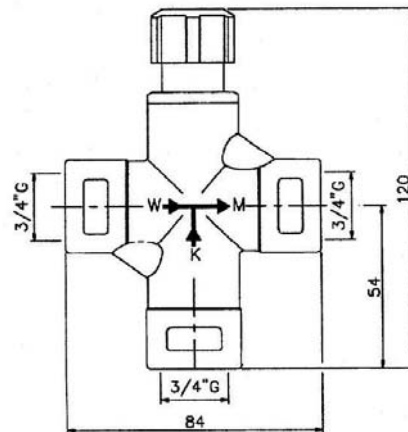

Thermostatic Mixing Valve to ensure a stable mixed Water for domestic Water Installations between 30°C and 70°C (86°F to 158°F)

Pressure Rating PN 14 (203 psi)

Temperature Rating max. 85°C (185°F) water

Available also for **Solar Applications**

Dezincification resistant brass body

3 x Female Ends 3/4"

Mischventil zur Begrenzung und Regelung der Wassertemperatur in Trinkwasserversorgungsanlagen zwischen 30°C und 70°C

Druck PN 14

Max. Temperatur 85°C Wasser

Verfügbar auch für **Solaranwendungen**

Gehäuse aus entzinkungsfreiem Messing, gelb

3 x Innengewinde 3/4"


EAC

Pressure Reducing Valve Druckminderer



515	A	DN	L	I	H	D
51504	1/2"	15	132	75	123	58
51506	3/4"	20	143	75	123	58
51508	1"	25	161	87	121	58
51510	1 1/4"	32	190	105	176	SW 75
51512	1 1/2"	40	220	130	176	SW 75
51516	2"	50	255	140	180	SW 75

Dimensions in mm
Masse in mm

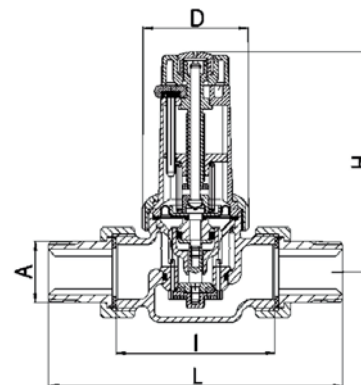

DVGW certified

With Pressure Gauge Connections 1/4" on both sides and Strainer

Inlet Pressure max. 16 bar (232 psi)

Outlet Pressure adjustable between 1,5 and 6 bar (21,8 and 87 psi), factory pre-set at 4 bar (58 psi)

Temperature Rating max. 30°C (86°F) water

Bronze Body

With male threaded unions

Longer Version up to 1" available on demand

DVGW zertifiziert

Mit beidseitigen Manometeranschlüssen 1/4" und Schmutzfänger

Eingangsdruck max. 16 bar

Ausgangsdruck regelbar von 1,5 bis 6 bar, werkseitig voreingestellt auf 4 bar

Max. Temperatur 30°C Wasser

Gehäuse aus Rotguss

Mit Aussengewinde-Anschlüssen

Längere Ausführung bis 1" auf Anfrage