

[Startseite](#) > [Dokumentation](#) > [Shelly EM Mini Gen4](#)

Shelly EM Mini Gen4



Device identification

- Device name: **Shelly EM Mini Gen4**
- Device model: **S4EM-001PXCEU16**
- Device SSID: **ShellyEMMiniG4-XXXXXXX**
- BLE model ID: **0x1033**

Short description

Shelly EM Mini Gen4 is a small form factor energy meter. Enhanced with all the gen3 firmware flexibility and also some of EM type Shelly devices, it provides professional integrators with additional options for end-customer solutions. It can work standalone in a local Wi-Fi network, or it can also be operated through cloud home automation services through MQTT, HTTP, and WebSocket. All inbound connections support TLS. The device is an improved version of Shelly PM Mini Gen3 with a more advanced processor and Zigbee connectivity.

Shelly EM Mini Gen4 can be accessed, set up, and monitored remotely by the User, as well as the Device can access and communicate with an automation system, as long as they are in the same network infrastructure.

The Device has an embedded Web Interface which can be used to monitor and control the device, as well as adjust its settings. The device has multi-protocol wireless MCU which provide Zigbee and Bluetooth connectivity ensuring a secure connection.

This device is compatible with Matter.

Main features


- **Power Meter:** Designed as a small form factor power meter, allowing you to monitor the power consumption of connected devices.
- **Enhanced Firmware Flexibility:** Inherits the flexibility of gen4 firmware, providing professional integrators with additional options for end-customer solutions.
- **Compact size:** EM Mini Gen4 can be connected in very tiny spaces, unreachable for other devices.
- **Improved Processor:** Upgraded with an improved processor and Zigbee connectivity for enhanced performance.
- **Zigbee Connectivity:** Zigbee is available for inclusion purposes, which may be useful during the setup process.
- **Remote Access:** Can be accessed, set up, and monitored remotely by the user, as well as communicate with an automation system within the same network infrastructure.
- **Embedded Web Interface:** Features an embedded web interface for monitoring, control, and adjustment of settings.
- **BLE Gateway:** Bridge between your Shelly BLU devices and the wider Shelly ecosystem. It receives Bluetooth signals and sends them to the cloud or locally to another non-bluetooth device.

- **Zigbee Range extender for IoT devices:** A Zigbee extender is employed to expand the reach of your Zigbee network by receiving your Zigbee signal, enhancing its strength, and then transmitting the enhanced signal over a wider area.
- **WiFi Range extender for IoT devices:** A WiFi extender is employed to expand the reach of your WiFi network by receiving your current WiFi signal, enhancing its strength, and then transmitting the enhanced signal over a wider area.
- **Scripting:** <https://shelly-api-docs.shelly.cloud/gen2/Scripts/ShellyScriptLanguageFeatures/>
- **Wide range of integrations:** The device can be integrated with 3rd party home systems, documented HTTP API, MQTT(s), Web Hooks over HTTP and HTTPS, UDP

Use cases

- **Power Consumption Monitoring:** The primary purpose is to monitor the power consumption of connected devices in real-time. This information can be valuable for understanding energy usage patterns and making informed decisions to reduce consumption.
- **Energy Efficiency Optimization:** Identify energy-hungry appliances and optimize their usage to improve overall energy efficiency in your home or workspace.
- **Appliance Health Check:** Keep track of the power usage of individual appliances to assess their health and performance over time. Sudden spikes or changes in power consumption may indicate issues with the appliance.
- **Cost Management:** With the knowledge of power consumption, you can estimate the cost of running specific devices and manage your electricity expenses more effectively.
- **Space-Efficient Retrofitting:** Integrate the device into standard electrical wall boxes, behind power sockets, light switches, or other locations with limited space.
- **Remote Monitoring:** Like the Shelly PM Mini Gen3, the EM Mini Gen4 also supports remote access. This allows you to monitor power consumption even when you're away from home. The device shares similarities to Shelly EM Gen3

Simplified internal schematics

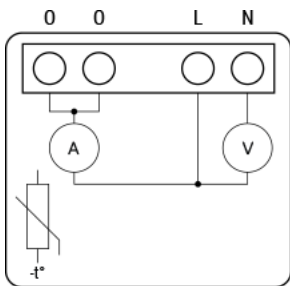

Device electrical interfaces

Inputs

- 2 line inputs on screw terminals: 1 L and 1 N

Outputs

- 2 load circuit outputs (bridged internally): 2 O

Connectivity

- Wi-Fi
- Bluetooth
- Zigbee

Supported load types

- Resistive (incandescent bulbs, heating devices)
- Capacitive (LED light drivers, capacitor banks, electronic equipment, motor start capacitors)
- Inductive (transformers, fans, refrigerators, air-conditioners)

User interface

Inputs

- One (Control) button
 - Press and hold for 5 seconds to enable Device access point and Bluetooth connection.
 - Press and hold for 10 seconds to factory reset the Device.
 - Press 5 consecutive times to switch the Device from Matter firmware (default) to Zigbee.
 - Press 3 consecutive times to put the Device in Zigbee inclusion mode. The Device stays in this mode for 2 minutes and you can find it in the Home Automation platform through the Zigbee Hub.

Outputs

- LED (monocolor) indication
 - AP (Access Point) enabled and Wi-Fi disabled:
1 second ON / 1 second OFF
 - Wi-Fi enabled, but not connected to a Wi-Fi network:
1 second ON / 3 seconds OFF
 - Connected to a Wi-Fi network:
Constantly ON
 - Cloud is enabled, but not connected:
1 second ON / 5 seconds OFF
 - Connected to Shelly Cloud:
Constantly ON
 - OTA (Over the Air Update):
½ sec ON / ½ second OFF
 - Button pressed and held for 5 seconds:
½ second ON / ½ second OFF
 - Button presses and held for 10 seconds:
¼ second ON / ¼ second OFF

The list above starts with the initial device status and the lowest priority. Every next state cancels the previous one.

Specifications


Quantity	Value
Physical	
Size (HxWxD):	29x34x16 mm / 1.34x1.11x0.63 inch
Weight:	13 g / 0.46 oz
Screw terminals max torque:	0.4 Nm / 3.5 lbin
Conductor cross section:	0.2 to 2.5 mm ² / 24 to 14 AWG (solid, stranded, and bootlace ferrules)
Conductor stripped length:	6 to 7 mm / 0.24 to 0.28 in

Mounting:	Wall console
Shell material:	Plastic
Shell color:	White
Terminals color:	Grey (Mouse Grey)
Environmental	
Ambient working temperature:	-20 °C to 40 °C / -5 °F to 105 °F
Humidity:	30 % to 70 % RH
Max. altitude:	2000 m / 6562 ft
Electrical	
Power supply:	<ul style="list-style-type: none"> • 110-240 V~
Power consumption:	< 1 W
External protection:	Tripping characteristic B or C, max. 16A max. rated current, min. 6 kA interrupting rating, energy limiting class 3
Sensors, meters	
Voltmeter (AC):	110-240 V~ 50/60 Hz
Voltmeter accuracy:	±1%
Ammeter (AC):	0 - 16A
Ammeter accuracy:	±1%
Power and energy meters:	<ul style="list-style-type: none"> • Active power • Active energy
Measurement data storage:	At least 10 days of 1 min data resolution
Data export:	<p>CSV for PQ recorded values</p> <p>JSON format export through RPC</p>

Output circuits ratings	
Power measurement:	Yes
Max. measurement voltage:	240 V~
Max. measurement current:	16 A
Max. measurement power:	3840 W
Radio	
Wi-Fi	
Protocol:	802.11 b/g/n/ax
RF band:	2412 - 2472 MHz
Max. RF power:	< 20 dBm
Range:	Up to 30 m / 100 ft indoors and 50 m / 160 ft outdoors (Depends on local conditions)
Bluetooth	
Protocol:	5.0
RF band:	2402 - 2480 MHz
Max. RF power:	< 4 dBm
Range:	Up to 10 m / 33 ft indoors and 30 m / 100 ft outdoors (Depends on local conditions)
Zigbee	
Protocol:	802.15.4
RF bands:	2400 to 2483.5 MHz
Max. RF power:	< 20 dBm

Range:	Up to 100 m / 328 ft indoors and 300 meters / 984 ft outdoors (Depends on local conditions)
Microcontroller unit	
CPU:	ESP-Shelly-C68F
Flash:	8MB
Firmware capabilities	
Schedules:	20
Webhooks (URL actions):	20 with 5 URLs per hook
Scripting:	Yes
MQTT:	Yes
UDP:	Yes
Advanced schedules:	Yes
KVS (Key-Value Store):	Yes

Basic wiring diagrams

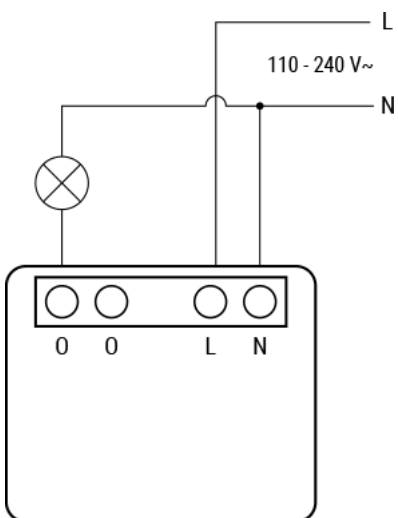

Legend

Terminals	Wires
-----------	-------

O	Load circuit output terminals (bridged internally)	L	Live (110-240 V) wire
L	Live (110-240 V) terminal	N	Neutral wire
N	Neutral terminal		

Shelly Smart Control

- [Adding the device to the Shelly Smart Control](#)

Components and APIs

- [This device](#)
- [All Shelly devices and services](#)

Compliance

[Shelly EM Mini Gen4 multilingual EU declaration of conformity 2025-07-21.pdf](#)

[Shelly EM Mimi Gen4 UK PSTI ACT Statement of compliance.pdf](#)

[Compliance archive](#)

[Shelly EM Mini Gen4 multilingual EU declaration of conformity 79 2025-03-14.pdf](#)

Printed user guide

[Shelly EM Mini Gen 4 multilingual printed user and safety guide.pdf](#)

- [Ръководство за употреба и безопасност](#)

Installation guides

Sign up for our newsletter

Enter your email address

„By checking this box, I consent to receive newsletters and marketing information about Shelly products, services and joint campaigns with Shelly's partners via email in accordance with the Privacy policy. I am aware that I can unsubscribe at any time.”

[X](#) [Instagram](#) [Facebook](#) [YouTube](#)

Unternehmen

© Copyright Shelly 2025.