



Meaningful Innovation.

WEEE Number: 80133970

# INSTRUCTION MANUAL

## LED SOLAR WALL LIGHT

### TECHNICAL DATA

MODEL	VT-762-2
SKU	8276/8277
POWER/LUMEN	1.5W/220LM
LEDs	SMD2835*14PCS
LI-ION BATTERY	1200 mAh / 3.7V, 18650
SOLAR PANEL	0.7Wp, Mono-crystalline silicon
WORKING MODE	2 different lighting modes
DETECTION ANGLE/AREA	90°/2-6Mtr
VISIBLE DISTANCE	6-7Mtr
IP DEGREE	IP 65
LIFESPAN	35,000hrs
INSTALLATION HEIGHT	2-4Mtr



**02** YEAR  
WARRANTY\*

### INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

### WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified person.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.




Non-replaceable light source



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.



Non-replaceable control gear




### MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

## NOTICE


1. Pls install this light onto flat surface directionally to get enough solar.
2. The lamp will light up when the environmental brightness is less than 30lux.
3. Inside battery is replaceable, 18650 Li-ion battery, 1200mAh/3.7V.
4. Lamp need to be installed 2-4Mtr from the ground.

## INSTALLATION

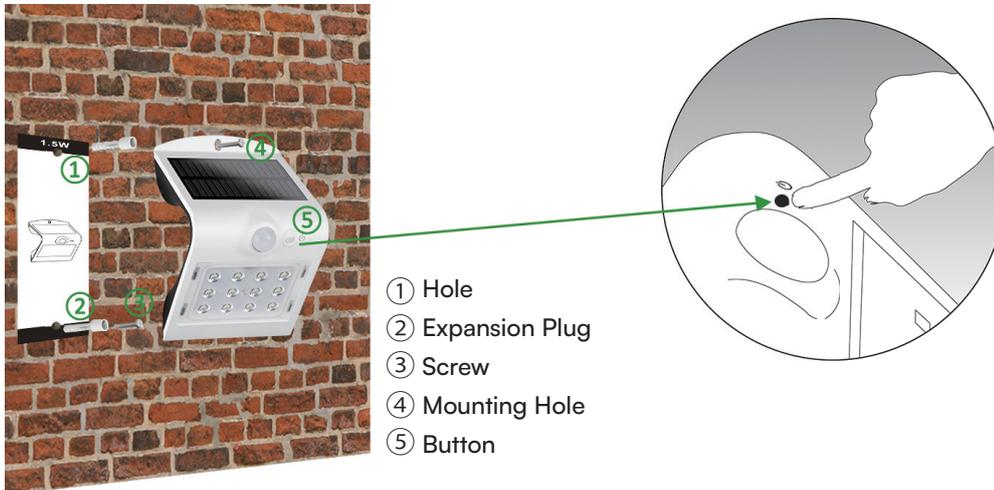


1. Pls use the card to measure hole position correctly and drill 2 holes.
2. Fix 2 expansion plugs into the holes.
3. Fix a screw to the lower expansion plug with a spare space, insert the notch onto the screw.
4. Straighten the whole lamp and fasten the upper screw.
5. Press the button to adjust to demanded working mode.

## WORKING MODES

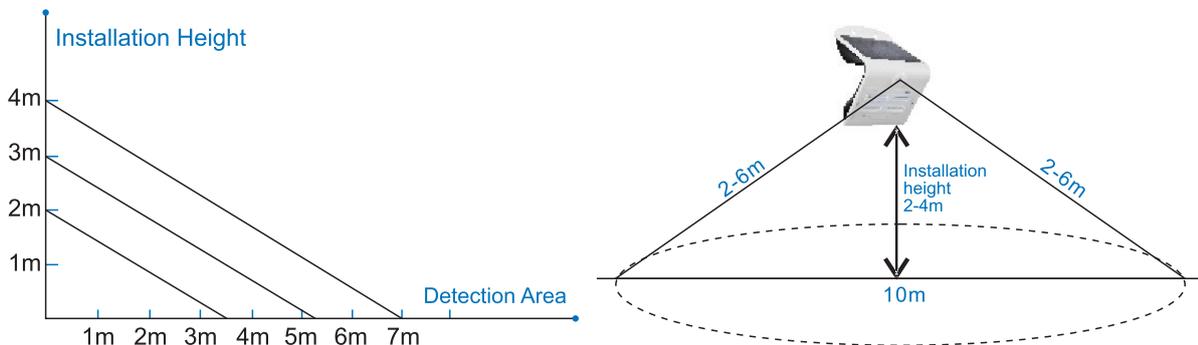

Pls press the Button to adjust working mode:

Press 1st time for Mode A. Press 2nd time for Mode B. Press 3rd time for off.

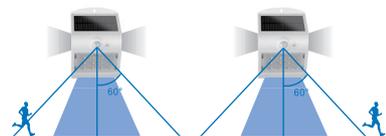

**Mode A:** Automatically turns on to full brightness (220lm) when motion is detected in the range  $\leq 6$  mtrs and then turns to weak brightness (front light on & back light on) in 10 seconds of no motion.



**Mode B:** Automatically turns on to full brightness (220lm) when motion is detected in the range  $\leq 6$  mtrs and then turns to weak brightness (front light off & back light on) in 10 seconds of no motion.

