



TT-TNS

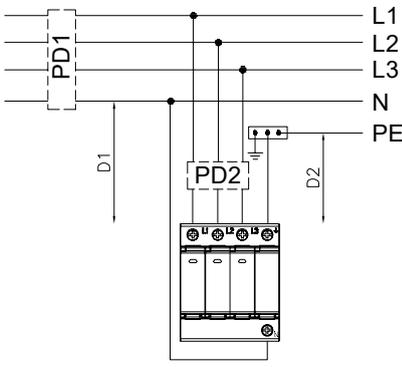

$D1+D2 \leq 50\text{cm}$


230/400V
± 10%

OVR T2 3N 10-350 P (TS), OVR T2 3N 20-350 P (TS),
OVR T2 3N 40-350 P (TS), OVR T2 3N 80-350 P (TS),
OVR T1 3N 12.5-350 P (TS)

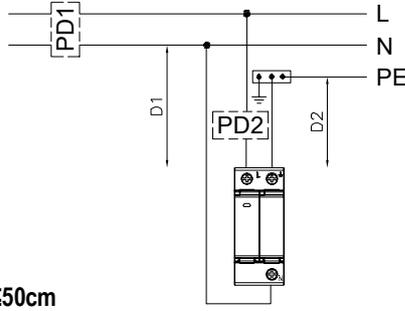

OVR T2 1N 10-350 P (TS), OVR T2 1N 20-350 P (TS),
OVR T2 1N 40-350 P (TS)

TNS

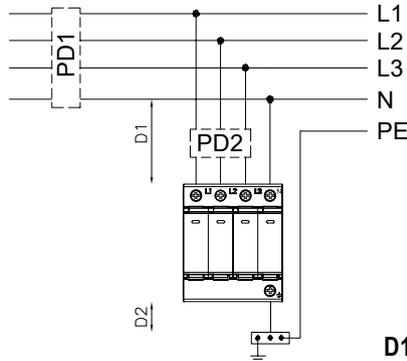

$D1+D2 \leq 50\text{cm}$

230/400V
± 10%

OVR T2 4L 10-350 P (TS), OVR T2 4L 20-350 P (TS),
OVR T2 4L 40-350 P (TS), OVR T2 4L 80-350 P (TS),
OVR T1 4L 12.5-350 P (TS)

PD2

Surge Protective Device Type	SPD Specific Protective Device Type
OVR T1 3N 12.5-350 P (TS), OVR T1 4L 12.5-350 P (TS)	POD T1 12.5/xx/xx
OVR T2 3N 80-350 P (TS), OVR T2 4L 80-350 P (TS)	POD T2 80/xx/xx
OVR T2 3N 40-350 P (TS), OVR T2 4L 40-350 P (TS), OVR T2 1N 40-350 P (TS)	POD T2 40/xx/xx
OVR T2 3N 20-350 P (TS), OVR T2 4L 20-350 P (TS), OVR T2 1N 20-350 P (TS)	POD T2 20/xx/xx
OVR T2 3N 10-350 P (TS), OVR T2 4L 10-350 P (TS), OVR T2 1N 10-350 P (TS)	POD T2 20/xx/xx

I_{SCCR}	$I_{fr} (N-PE)$	I_{PE}	U_{ref}	Type	Standards
100kA a.c.	100A a.c.	$\leq 50 \mu A$	255V a.c.	OVR T1... Type 1+2 / Class I+II	IEC 61643-11
				OVR T2... Type 2 / Class II	GB/T 18802.11

$L > 10\text{m}$

$L \leq 10\text{m}$ $L \leq 10\text{m}$

-40°C +80°C

$\leq 93\%$

≥8mm

2.0 Nm / 17.7 lb.in

12.5 mm / 0.5 in

min. 2.5 mm² / 14 AWG
max. 35 mm² / 2 AWG

12.5 mm / 0.5 in

min. 2.5 mm² / 14 AWG
max. 25 mm² / 3 AWG

0.34 Nm / 3 lb.in

min. 0.5 mm / 20 AWG
max. 1.5 mm / 16 AWG


5 mm / 0.19 in

min. 12Vdc / 10 mA
max. 250 Vac / 1 A


Red = Replace

2TAN507001P0001


Parafoudre
Surge Protective Device
Überspannungsableiter
Scaricatore di sovratensioni
Pararrayo
Protecção contra sobretensões
Skydd mot överspänningar
Защита от перенапряжений
电涌保护器



OVR T2 1N 10-350 P (TS)
OVR T2 1N 20-350 P (TS)
OVR T2 1N 40-350 P (TS)



OVR T2 3N 10-350 P (TS)
OVR T2 3N 20-350 P (TS)
OVR T2 3N 40-350 P (TS)
OVR T2 3N 80-350 P (TS)
OVR T1 3N 12.5-350 P (TS)



OVR T2 4L 10-350 P (TS)
OVR T2 4L 20-350 P (TS)
OVR T2 4L 40-350 P (TS)
OVR T2 4L 80-350 P (TS)
OVR T1 4L 12.5-350 P (TS)