iglooh^me

Key Fob

Unlock with just one click.

The igloohome Key Fob is the perfect add-on for anyone with an igloohome smart lock. Designed to let you unlock with just one click, you won't need a smartphone to access your home if you use more than one lock to secure your door.

t







KEY FOB MOUNTING BRACKET

Unique features



Smartphones aren't for everyone.

Using a smart lock does not mean you need a smartphone all the time. Great for the elderly or your young children, the Key Fob offers an alternative mode of access to your home.



One click is all you need.

Unlock both your gate and door at the same time. The igloohome Key Fob is especially useful when you use more than one igloohome lock for your home.



\otimes

Compatible across multiple locks

The Key Fob is compatible with selected igloohome locks.

 ${}^{\star}\!S$ elected lock models are listed in specifications.



Unlock function

Click the button to unlock.



Lock function

Hold the button down for two seconds to lock.




Low battery alert

An intuitive LED visual alert will prompt you to change the batteries when it runs low.




Access on your terms

Pair multiple Key Fobs to your lock. Each Key Fob can be paired with up to 199 locks and unlocks a maximum of 5 paired locks within range simultaneously

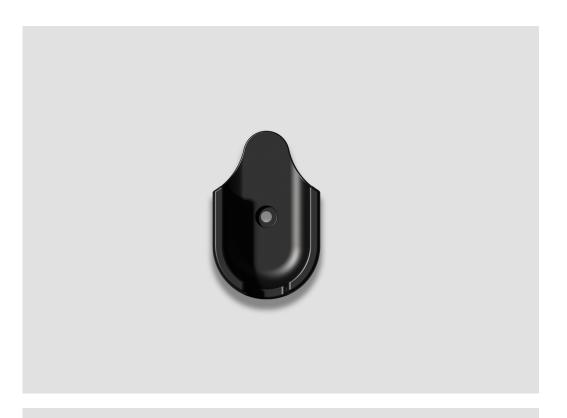




Specifications







Model Number

UPC EAN IEF1

712198882404 0712198882404

Lock Compatibility

Deadbolts Keyboxes Smart Deadbolt 2S Metal Grey

Smart Keybox 3

Mortises Smart Mortise 2, Smart Mortise 2+
Rim Locks Smart Rim Lock (Metal Gate)

43g

27g

Padlocks Smart Padlock

Dimensions

With mounting bracket
Without mounting bracket

39 (W) x 68 (H) x 18.6 (T) mm / 1.5 (W) x 2.7 (H) x 0.7 (T) in 32 (W) x 65 (H) x 13 (T) mm / 1.3 (W) x 2.6 (H) x 0.5 (T) in

Weight

Gross Net

Material

Body ABS, PC

Operations

Modes of access (Entry) Operation temperature

ess (Entry) Lock/Unlock Button perature -25°C to 45°C

Power type 1 CR2032 coin cell battery
Battery life Up to 2 years

Battery life Up to 2 years
Battery operating -30°C to 60°C

Others

Warranty Country of Origin Packaging Details Certifications 1 year on mechanical and electronic defects Designed in Singapore, made in China Individual: 88 (W) x 93 (D) x 22.5 (H) mm at kg IP54 Certified

