



Report No.: RKEYS250512073R01

Date: May. 21, 2025

Page 1 of 16

TEST REPORT

COMMISSION REGULATION (EU) 2019/2020 of 1 October 2019**laying down ecodesign requirements for light sources and separate control gears pursuant to Directive 2009/125/EC of the European Parliament and of the Council****And Commission Delegated Regulation (EU) 2021/340 of 17 December 2020****And Commission Regulation (EU) 2021/341 of 23 February 2021**

Report reference No..... : RKEYS250512073R01

Tested by..... : Sunny Li

Approved by : Jason Zhan

Date of issue..... : May. 14, 2025

Contents..... : 16 pages

Testing Laboratory:

Name..... : Guangdong KEYS Testing Technology Co., Ltd.

Address..... : Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China

Testing location : As above

Client:

Name..... : Ningbo Ehome Electronic Co.,Ltd

Address..... : Yonghe Road, Qiaotouhu Industrial Zone, Ninghai, Ningbo, China

Manufacturer:

Name..... : Ningbo Ehome Electronic Co.,Ltd

Address..... : Yonghe Road, Qiaotouhu Industrial Zone, Ninghai, Ningbo, China

Scan to view
the original file**Guangdong KEYS Testing Technology Co., Ltd.**Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-89798319 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

**Test specification:**

Standard.....:	COMMISSION REGULATION (EU) 2019/2020 of 1 October 2019 COMMISSION DELEGATED REGULATION (EU) 2019/2015 Commission Delegated Regulation (EU) 2021/340 of 17 December 2020 Commission Regulation (EU) 2021/341 of 23 February 2021 COMMISSION REGULATION (EU) 2019/2020 of 1 October 2019
Test procedure..... :	COMMISSION DELEGATED REGULATION (EU) 2019/2015 Commission Delegated Regulation (EU) 2021/340 of 17 December 2020 Commission Regulation (EU) 2021/341 of 23 February 2021
Non-standard test method.....:	N/A

Test item description.....:	Infrared LED Sensor Lamp
Trade Mark..... :	N/A
Model and/or type reference.....:	ST61XQD
Rating(s)(V/Hz).....:	AC220-240V, 50/60Hz, 40W

Test case verdicts

Test case does not apply to the test object	N(N/A)
Test item does meet the requirement:	P(Pass)
Test item does not meet the requirement.....:	F(Fail)

Testing

Date of receipt of test item..... :	Dec. 11, 2023
Date(s) of performance of test.....:	Dec. 11, 2023 to May. 14, 2025

Test item particulars:
Type of light source:

- | | |
|----------------------------------|---|
| - Lighting technology used | ☐ HL ☐ LFLT5HE ☐ LFL T5 ☐ CFLni ☐ other FL
☐ HPS ☐ MH ☐ other HID ☒ LED ☐ OLED
☐ mixed ☐ other |
| - Non-directional or directional | ☒ NDLS ☐ DLS |
| - Mains or non-mains | ☒ MLS ☐ NMLS |
| - Connected light source (CLS) | ☐ Yes ☒ No |
| - Colour-tuneable light source | ☐ Yes ☒ No |
| - Envelope | ☒ No ☐ second ☐ non-clear |
| - High luminance light source | ☐ Yes ☒ No |
| - Anti-glare shield | ☐ Yes ☒ No |
| - Dimmable | ☐ Yes ☐ only with specific dimmers ☒ No |
| - Control gear | ☒ Integrated ☐ External |
| - Use of light source | ☒ Indoor ☐ Outdoor |

Lamp cap installed:

N/A

General product parameters

Energy consumption in on-mode (kWh/1 000 h) 40W

Energy efficiency class ☐A ☐B ☐C ☐D ☒E ☐F ☐G

Rated useful luminous flux.....(lm): 4500lm

Rated CCT(K): 3000K

Power (Pon), expressed in W.....: 40W

Standby power (Psb).....(W): N/A

Networked standbypower(Pnet)for CLS.(W): N/A

Rated Ra.....: >80

Outer dimensions.....(mm): --

Guangdong KEYS Testing Technology Co., Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-89798319 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

Spectral power distribution.....: See Table 4: Spectral power distribution

Claim of equivalent power: ☐ YES ☒ No

Chromaticity coordinates (x and y)....: x: 0.451 y:0.411

Peak luminous intensity(cd) : 1258

Beam angle in degrees.....(°): 122.7

R9 colour rendering index value R9...: 40

Survival factor: $\geq 90\%$

The lumen maintenance factor.....: $\geq 93.12\%$

Displacement factor (cos ϕ 1).....: ≥ 0.9

Colour consistency in McAdam ellipses.....: ≤ 6

Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.....: ☐ YES ☒ No

Flicker metric (Pst LM): ≤ 1.0

Stroboscopic effect metric (SVM)....: ≤ 0.4

Rated life time(h): 15000

Attachments:

The test report includes: ATTACHMENT 1(S) of Energy efficiency classes

The test report includes: ATTACHMENT 2(S) of Spectral power distribution

The test report includes: ATTACHMENT 3(S) of Photos

Summary of testing:

1. These results are in compliance with the ecodesign requirements of the Commission Regulation (EU) 2019/2020.
2. Measurement was conducted at voltage AC230V and a stable ambient temperature $25 \pm 10^\circ\text{C}$.
3. THD $\leq 3\%$

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report. "(see appended table)" refers to a table



appended to the report.

Throughout this report a point is used as the decimal separator.

Remark:

This test report replaces test report No. RKEYS250512073 released on May. 14, 2025 as the current valid report, the original test report is void.

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
Annex I (Clause)	Definitions in Regulation (EU) 2019/2020		P
	Number of sample used for test	10 pcs	P
(3)	Directional Light Source		N
	at least 80 % of total luminous flux within a solid angle of π sr (corresponding to a cone with angle of 120°)		N
(15)	Useful luminous flux Φ_{use}		P
	for non-directional light sources it is the total flux emitted in a solid angle of 4π sr (corresponding to a 360° sphere)		P
	for directional light sources with beam angle $\geq 90^\circ$ it is the flux emitted in a solid angle of π sr (corresponding to a cone with angle of 120°)		N
	for directional light sources with beam angle $< 90^\circ$ it is the flux emitted in a solid angle of $0,586\pi$ sr (corresponding to a cone with angle of 90°)		N
Annex II (Clause)	Energy Efficiency Requirements in Regulation (EU) 2019/2020		P
1.(a)	Energy Efficiency Requirements – Light Source		P
	On-mode Power P_{on} (W):	$P_{on}=39.75W$	P
	Maximum Allowed Power P_{onmax} (W): $P_{onmax} = C \times (L + \Phi_{use}/(F \times \eta)) \times R$	$P_{onmax}=43.97W$	P
	Φ_{use} :	4586.5lm	P
	Threshold efficacy η (lm/W): η for LED:	115	P
	End loss factor L (W) depending on light source: L for LED:	1.5	P
	End loss factor L (W) for connected light sources: 2.0		N
	Efficacy Factor F: 1.00 for non-directional light sources (NDLS, using total flux)	1.00	P
	Efficacy Factor F:		N

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
	0.85 for directional light sources (DLS, using flux in a cone)		N
	CRI Factor R: 0.65 for CRI ≤ 25		N
	CRI Factor R: (CRI+80)/160 for CRI > 25, rounded to two decimals	$R=(84.0+80)/160=1.025$	P
	Correction Factor C Depending on Light Source Characteristics in Table 2		N
	Non-directional (NDLS) not operating on mains (NMLS), Basic Value: 1.00		N
	Non-directional (NDLS) operating on mains (MLS), Basic Value: 1.08		P
	Directional (DLS) not operating on mains (NMLS), Basic Value: 1.15		N
	Directional (DLS) operating on mains(MLS), Basic Value: 1.23		N
	Special Light Source Bonus on C		N
1.(a)	Standby power – Light Source		N
	The standby power P_{sb} of a light source shall not exceed 0.5 W		N
	The networked standby power P_{net} of a connected light source shall not exceed 0.5 W		N
	The allowable values for P_{sb} and P_{net} shall not be added together		N
1.(b)	Energy Efficiency Requirements – Separate Control Gear (at full-load)		N
	Control gear for LED or OLED light sources: $P_{eg}^{0.81} / (1.09 \times P_{eg}^{0.81} + 2.10)$		N
	The no-load power P_{no} of a separate control gear shall not exceed 0.5 W		N

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
	The standby power P_{sb} of a separate control gear shall not exceed 0.5 W		N
	The networked standby power P_{net} of a connected separate control gear shall not exceed 0.5 W		N
	The allowable values for P_{sb} and P_{net} shall not be added together		N
2.	Functional Requirements – Light Source (Table 4)		P
	Colour Rendering Index CRI: ≥ 80	> 80	P
	Displacement Factor DF at Power Input P_{on} for LED and OLED MLS:		P
	No limit at $P_{on} \leq 5$ W DF ≥ 0.5 at 5 W $< P_{on} \leq 10$ W, DF ≥ 0.7 at 10 W $< P_{on} \leq 25$ W DF ≥ 0.9 at 25 W $< P_{on}$	0.95	P
	Lumen Maintenance Factor (for LED and OLED): $X_{LMF,MIN}\% = 100 \times e^{\frac{(3000 \times \ln(0.7))}{L_{70}}}$	98.46%	P
	Survival Factor (for LED and OLED): At least 9 light sources of the test sample must be operational after completing the test in Annex V of this Regulation.	100%	P
	Colour consistency for LED and OLED light	≤ 6	P
	sources: Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.		P
	Flicker for LED and OLED MLS: $P_{st} LM \leq 1.0$ at full-load	0.008	P
	Stroboscopic effect for LED and OLED MLS: SVM ≤ 0.9 at full-load; From 1 September 2024 SVM ≤ 0.4 at full-load	0.004	P

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
3.(a)	Information to be displayed on the light source itself		P
	Useful luminous flux (lm)		P
	Correlated colour temperature (K)		P
	Beam angle (°)..... For directional light sources		N
3.(b)	Information to be visibly displayed on the packaging		P
3.(b)(1)	Light source placed on the market, not in a containing product		P
	Useful luminous flux (lm): In a font at least twice as large as the display of the on-mode power (Pon) Clearly indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		P
	(b) Correlated Colour Temperature, rounded to the nearest 100 K		P
	(c) Beam angle in degrees For directional light sources		N
	(d) electrical interface details, e.g. cap- or connector-type, type of power supply (e.g. 230 V AC 50 Hz, 12 V DC)		P
	(e) L70B50 lifetime for LED and OLED light sources, expressed in hours		P
	(f) on-mode power (Pon), expressed in W		P
	(g) standby power (Psb), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging		N
	(h) networked standby power (Pnet) for CLS, expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging		N
	(i) Colour Rendering Index, rounded to the nearest		P

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
	integer		
	(j) Clear indication to this effect, if CRI< 80, and the light source is intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI< 80.		N
	(k) Information on non-standard conditions (such as ambient temperature $T_a \neq 25\text{ }^{\circ}\text{C}$ or specific thermal management is necessary)		P
	(l) a warning if the light source cannot be dimmed or can be dimmed only with specific dimmers or with specific wired or wireless dimming methods. In the latter cases a list of compatible dimmers and/or methods shall be provided on the manufacturer's website		N
	(m) if the light source contains mercury: a warning of this, including the mercury content in mg rounded to the first decimal place		N
	(n) if the light source is within the scope of Directive 2012/19/EU, without prejudice to marking obligations pursuant to Article 14(4) of Directive 2012/19/EU, or contains mercury: a warning that it shall not be disposed of as unsorted municipal waste		N
3.(b)(2)	Separate control gears For separate control gear placed on the market as a stand-alone product, not as a part of a containing product		N
	(a) the maximum output power of the control gear (for HL, LED and OLED) or the power of the light source for which the control gear is intended (for FL and HID)		N
	(b) the type of light source(s) for which it is intended		N
	(c) the efficiency in full-load, expressed in percentage		N

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
	(d) the no-load power (Pno), expressed in W and rounded to the second decimal, or the indication that the gear is not intended to operate in no-load mode. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites		N
	(e) the standby power (Psb), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in		N
	(f) the networked standby power (Pnet), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites		N
	(g) a warning if the control gear is not suitable for		N
	dimming of light sources or can be used only with specific types of dimmable light sources or using specific wired or wireless dimming methods. In the latter cases, detailed information on the conditions in which the control gear can be used for dimming shall be provided on the manufacturer's or importer's website		N
	(h) a QR-code redirecting to a free-access website of the manufacturer, importer or authorised representative, or the internet address for such a website, where full information on the control gear can be found		N
3.(c)	Information to be visibly displayed on a free-access website of the manufacturer, importer or authorised representative		N
3.(c)(1)	Separate control gears For any separate control gear that is placed on the EU market, the following information shall be displayed on at least one free-access website:		N

(EU) 2019/2020			
Clause	Requirement + Test	Result - Remark	Verdict
	(a) the information specified in point 3(b)(2), except 3(b)(2)(h)		N
	(b) the outer dimensions in mm		N
	(c) the mass in grams of the control gear, without packaging, and without lighting control parts and non-lighting parts, if any and if they can be physically separated from the control gear		N
	(d) instructions on how to remove lighting control parts and non-lighting parts, if any, or how to switch them off or minimise their power consumption during control-gear testing for market surveillance purposes		N
	(e) if the control gear can be used with dimmable light sources, a list of minimum characteristics that the light sources should have to be fully compatible with the control gear during dimming, and possibly a list of compatible dimmable light sources		N
	(f) recommendations on how to dispose of it at		N

Appendix-Test Data Sheet

1、Initial Lumen Measurement and Color Performance:

Sample No.	Power Pon (W)	Disp. Factor	Luminous Flux Φ_{total} (lm)	Efficacy (lm/W)	Color Temp (CCT)	Color rendering (Ra)	R9	SDCM	x	y
1	39.75	0.950	4586.50	115.38	2845	83.6	40	2.3	0.449	0.4103
2	38.96	0.952	4540.64	116.55	2873	84.0	42	2.4	0.458	0.4165
3	40.94	0.945	4632.37	113.15	2859	83.2	41	2.3	0.451	0.4124
4	40.15	0.955	4618.61	115.03	2825	83.4	40	2.5	0.447	0.4066
5	40.62	0.960	4646.12	114.38	2871	84.4	40	2.3	0.454	0.4156
6	40.58	0.941	4563.57	112.46	2888	84.5	41	2.4	0.450	0.4107
7	40.98	0.931	4636.95	113.15	2865	84.2	42	2.2	0.451	0.4087
8	40.78	0.922	4614.02	113.14	2831	83.5	40	2.4	0.452	0.4128
9	40.23	0.960	4646.12	115.49	2876	84.3	41	2.3	0.448	0.4099
10	40.39	0.957	4669.06	115.60	2831	83.9	40	2.5	0.446	0.4091
Avg.	40.34	0.947	4615.39	114.41	2856	83.9	41	2.4	0.451	0.4112

Guangdong KEYS Testing Technology Co., Ltd.

Address: Building 1, No.18, Shihuan Road, Dongcheng Subdistrict, Dongguan, Guangdong, China
Tel: +86-0769-89798319 <http://www.keys-lab.com> E-mail: info@keys-lab.com

This report is only responsible for the test results of the samples submitted for inspection, and is not responsible for the source of the samples submitted for inspection.
This report shall not be altered, increased or deleted. Without written approval of KEYS, this test report shall not be copied except in full and published as advertisement.

2、Different Mode Power、Flicker、Stroboscopic Effect and Lumen Maintenance Test:

Sample No.	No-Load Power Pno	Standby Power Psb	Network Sb. Power Pnet	Flicker Pst LM	Stroboscopic Effect SVM	Total Luminous flux (lm)	Lumen Maintenance at 3600h (%)	Survival factor at 3600h
1	N/A	N/A	N/A	0.008	0.004	4515.90	98.46%	P
2	N/A	N/A	N/A	0.007	0.004	4538.48	99.95%	P
3	N/A	N/A	N/A	0.008	0.004	4554.29	98.31%	P
4	N/A	N/A	N/A	0.009	0.004	4543.00	98.36%	P
5	N/A	N/A	N/A	0.008	0.004	4590.41	98.32%	P
6	N/A	N/A	N/A	0.009	0.004	4484.29	98.46%	P
7	N/A	N/A	N/A	0.008	0.004	4555.64	98.25%	P
8	N/A	N/A	N/A	0.007	0.004	4552.03	98.66%	P
9	N/A	N/A	N/A	0.008	0.004	4560.61	98.16%	P
10	N/A	N/A	N/A	0.007	0.004	4574.61	98.26%	P
Avg.	N/A	N/A	N/A	0.008	0.004	4546.92	98.52%	P

ATTACHMENT 1(S)

Energy efficiency classes			
Standard	Clause	Model No.	Verdict
(EU) 2019/2015	Energy class	ST61XQD	P
Conditions	-Test conditions: -ambition: 25°C/65%R.H. -Test voltage:AC230V		
Φ _{use}	4586.5lm		
P _{on}	P _{on} = 39.75W		
FTM	1.00		
η _{TM}	115.38lm/W		
Technical requirements		Test result	
$\eta_{TM} = (\Phi_{use}/P_{on}) \times F_{TM} (lm/W).$		Energy efficiency class	Total mains efficacy η _{TM} (lm/W)
			--
		A	210 ≤ η _{TM}
		B	185 ≤ η _{TM} < 210
		C	160 ≤ η _{TM} < 185
		D	135 ≤ η _{TM} < 160
		E	110 ≤ η _{TM} < 135
		F	85 ≤ η _{TM} < 110
		G	η _{TM} < 85
Factors FTM by light source type			
Light source type		Factor FTM	--
Non-directional (NDLS) operating on mains (MLS)		1.000	P
Non-directional (NDLS) not operating on mains (NMLS)		0.926	N
Directional (DLS) operating on mains (MLS)		1.176	N
Directional (DLS) not operating on mains (NMLS)		1.089	N

ATTACHMENT2 (S)

Spectral power distribution



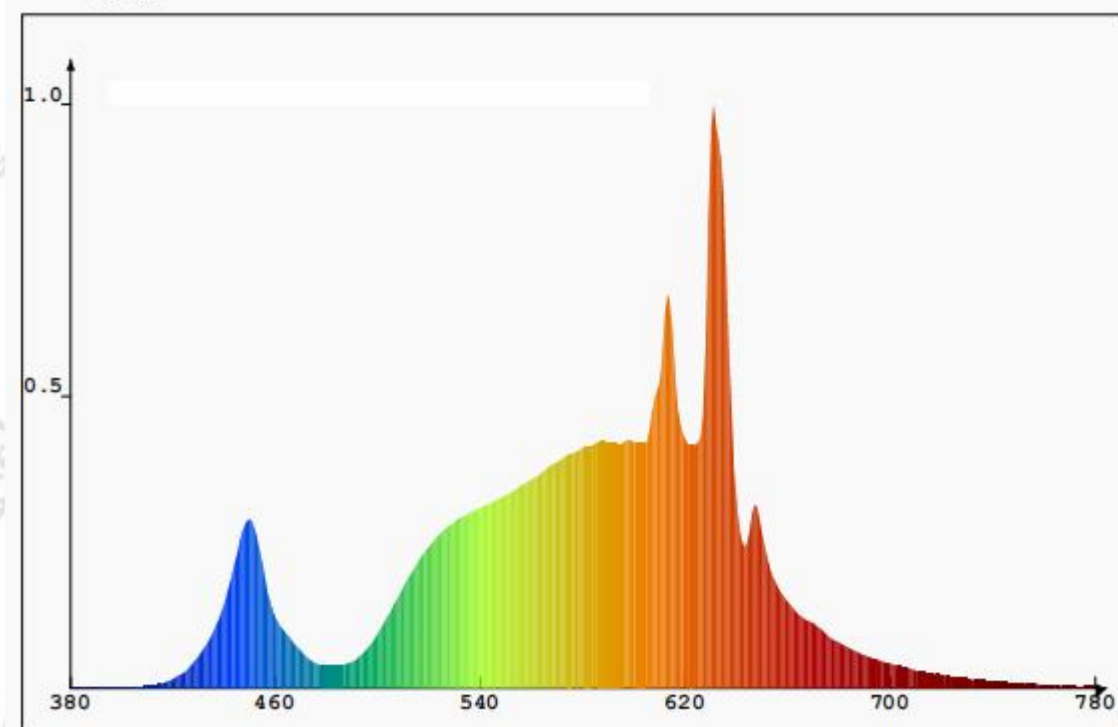


Photo documentation


- ☒ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

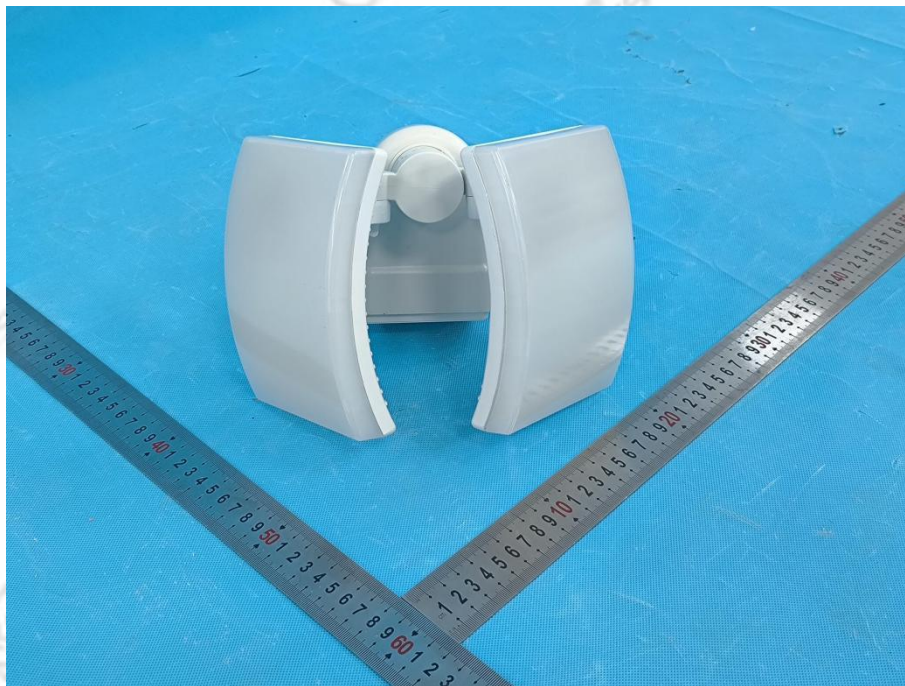

- ☐ front
- ☒ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

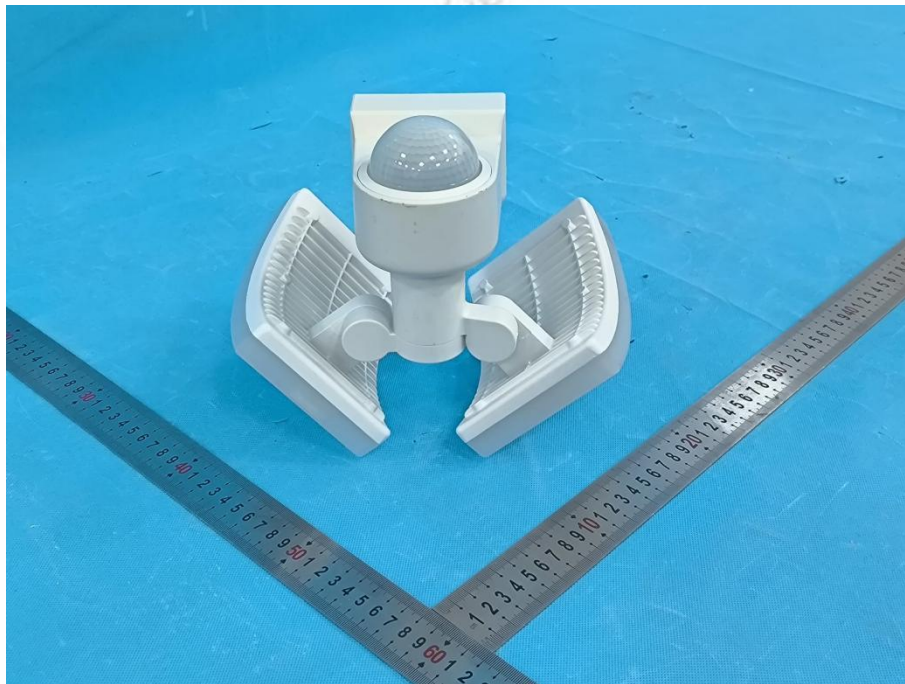

- ☒ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal

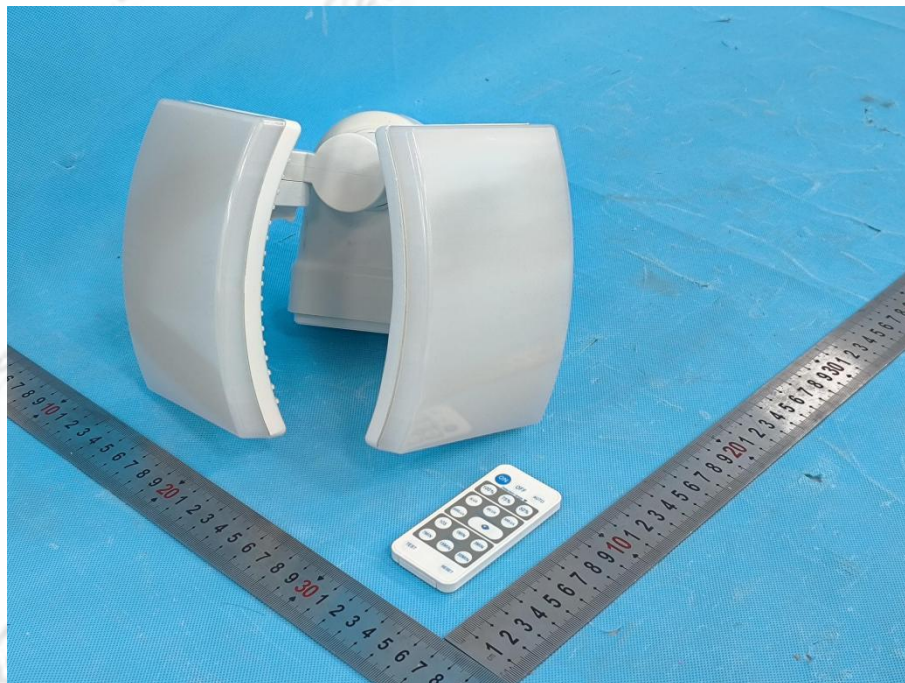

- ☒ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal



*** End of Report ***