
AL-KO
QUALITY FOR LIFE

ASSEMBLY INSTRUCTIONS
ROBOTIC LAWNMOWER GARAGE

Robot Garage Robolinho® Vision

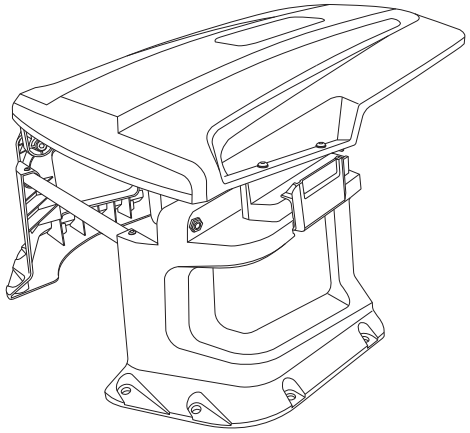


Ukraine
ТОВ АЛ-КО КОБЕР
вул. Броварська 156, 07442
с. Велика Димерка, Броварській район,
Київська область, Україна
Телефон/факс: +38 044 392-07-08 / 09

UK
Imported by: AL-KO Gardentech UK Ltd, Murray way, Wincanton, Somerset, BA9 9RS / UK | +44 (0) 1963 828055
shop.uk@al-ko.com | www.alko-garden.uk


AL-KO GERÄTE GmbH | Head Quarter | Ichenhauser Str. 14 | 89359 Kötz | Deutschland
Telefon: (+49)8221/203-0 | www.alko-garden.com/contact | www.alko-garden.com
AL-KO Service: www.alko-garden.com/service-contacts

01 | 2026


01

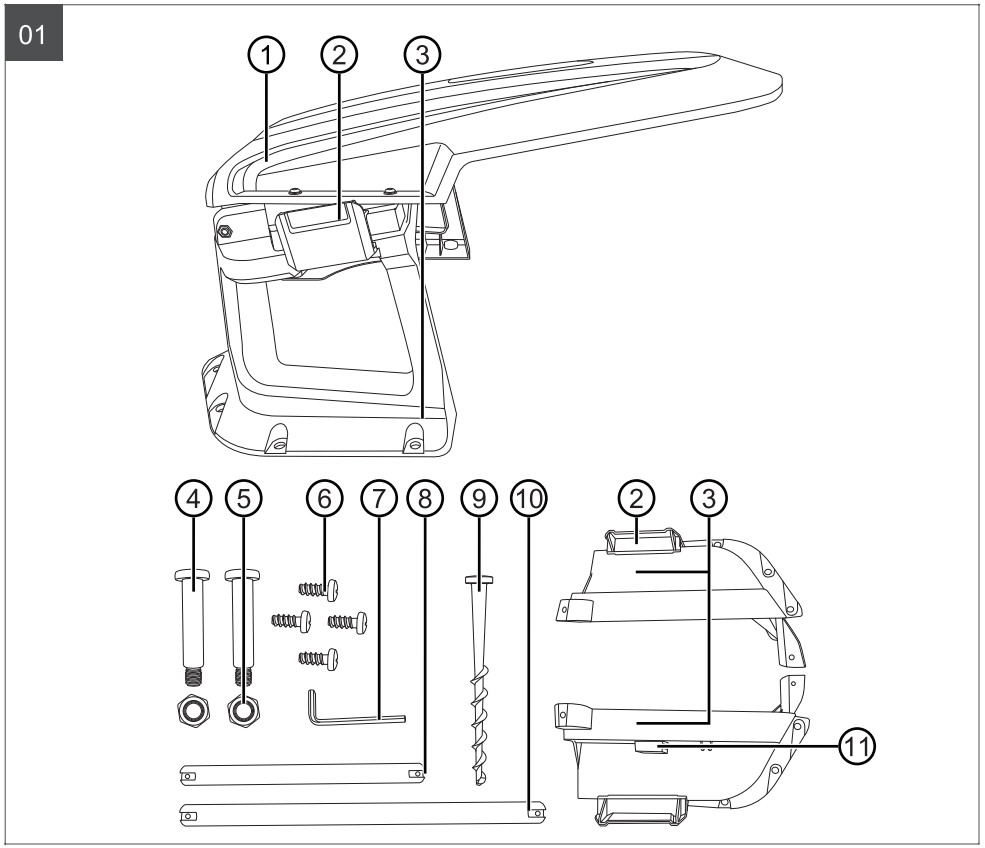


02

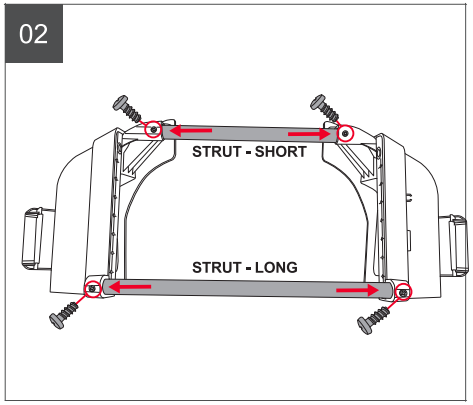


03

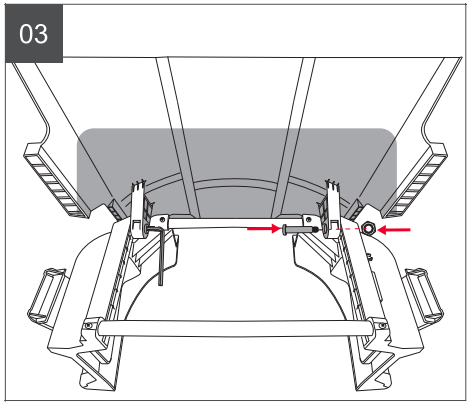

04

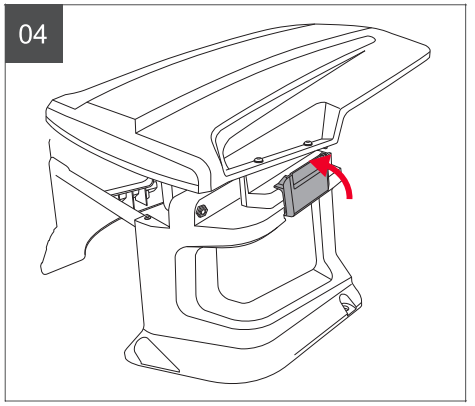

05

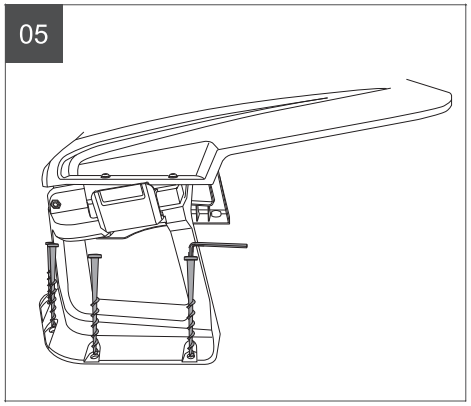

1 SCOPE OF SUPPLY (01)

The items listed here are included in the standard scope of supply. Check that all items are included:

No.	Component
1	Garage Hood
2	2 x Lock
3	2 x Foot
4	2 x Threaded Pin
5	2 x Nut
6	4 x Cross-Head Screw
7	Hex Key
8	Strut - Short
9	8 x Ground Anchor Screws
10	Strut - Long
11	Hex Key Storage

2 SETUP & PREPARATION

⚠ WARNING! Never stand or sit on the robot lawn mower garage. The garage is to be used only for its prescribed purpose.

2.1 Proper Use

1. The robot lawn mower garage is designed to protect your robot lawn mower and its charging station from weather conditions such as rain and sun. The garage does not protect your robot lawn mower from lightning.

2.2 Assembly (02 - 05)

1. Align the pre-drilled hole in the end of each Strut with the corresponding hole in each of the Feet. With the holes aligned fasten together using the four Cross-Head screws.
2. Place the Garage Hood onto the Feet and insert the two Nuts into the recesses on the outside. Then, push the Threaded Pins from the interior of the garage outwards — passing first through the Garage Hood and then through the Feet — until they engage with the Nuts.
3. With the Garage Hood closed, secure with the Locks on both sides.
4. Position the assembly over the rear of your charging station and secure the Feet to the ground using the Ground Anchor Screws with the provided Hex Key.

NOTE If you find the ground hard the Ground Anchor Screws may break when being screwed in. Water the lawn before installing the garage if the ground is dry and hard.

NOTE You can store the Hex Key in the storage slot (11) on the side of the garage.