



INSTRUCTION MANUAL




106126 Ruud WL 15 Black Smart

①



Turn off the power


②

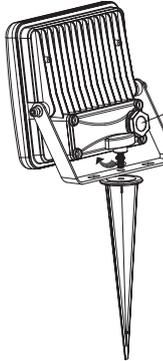

← N - blue - neutral wire
← G - green&yellow - earth wire (ground)
← L - brown - live wire

FLOOD LIGHT
30W Lamp
220-240V~50Hz
RGB
30000 h
15000 ON/OFF

③



Turn on the power



APP TUYA SMART PREPARATION

-Connect the mobile phone to the Wi-Fi network(2.4GHz band)

-Download **"TUYA APP"**. Available in IOS and Android or scan the attached **QR code**.

If you are a new APP user, you can register by clicking the **"Register"** button and following the registration instructions.

If you already have an account registered under "Tuya", you can access the login page by clicking on the "Login with an existing username" button.

HOW TO CONFIGURE THE LIGHTING FIXTURE

Turn on and off the light for three times, it will start blinking.

HOW TO CONNECT THE LIGHTING FIXTURE IF THE LIGHT BLINKES :

(1) Start the application, click **"+"** in the upper right corner of the screen, then click **"Add Device"**.

(2) Will start searching the nearby devices


(3) Click the orange button **"Add"** to confirm adding the light which is blinking.

(4) Select your Wi-Fi connection. Enter your Wi-Fi password and click **"Confirm"** to proceed the next step. the light will attempt to connect to your Wi-Fi network.

(5) After the light connects correctly, click the **"Done"** button. But first it would be convenient to **"rename"** the light as you wish.

(6) Users could choose the different RGB color by sliding the raindrop symbol on screen. also could choose different scene.

Overall sizes:

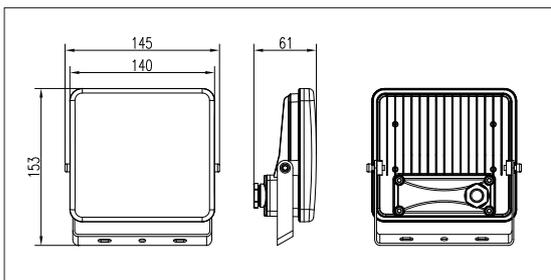

FittinQ B.V.

Smaragdweg 52, 5527 LB Hapert, The Netherlands
www.qazqa.nl

QAZQA

SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product.
Please keep this user manual for further reference



- The luminaires may only be installed by authorized and qualified technicians according the valid regulations for electrical installation.
- Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come into contact with any areas of the terminal connections or voltage control parts.
- The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- Exterior lighting must not be installed during rain.
- Take account of the minimal separation distance from other objects and the room required around the fitting.
- If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components
- Take account of all available technical information.
- Meaning of symbols:



For indoor use only, where direct contact with water is impossible



This icon indicates the level of water-proof and dust-proof



Protection Class I: the fitting must be earthed



Protection Class II: the fitting is doubled insulated and does not require earthing



Protection Class III: the fitting is low voltage



Minimum distance from lighted objects (meters)



The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons



The armature is designed to work only with the indicated voltage. Different items require different working voltage.



The luminaire can be used in combination with a dimmer



The reference light angle and light space of the luminaire



This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste

11. Take note of the symbols when connecting wires:

| | (DE) | (GB) | (FR) | (NL) | (PL) | (NO) | (DK) |
|----------|-----------------------|-------------------|----------------------------------|-------------------------|---------------------|--------------------|---------------------|
| L | Stromführender Leiter | Live conductor | Conducteur | Spanningvoerende draad | Przewód prądowy | Strømførende leder | Strømførende leder |
| | Schutzleiter | Earth conductor | Conducteur de protection (terre) | Aardkabel | Przewód uziemiający | Jordledningen | Jordledningen |
| N | Neutralleiter | Neutral conductor | Conducteur neutre | Nulleider | Przewód zerowy | Nøytralleider | Neutralleider |
| | (SE) | (FI) | (IT) | (ES) | (CZ) | (PT) | (GR) |
| L | Strömförande ledare | Virtajohdin | Conduttore sotto tensione | Conductor de corriente | Vodič pod napětím | Condutor vivo | Ρευματοφόρος αγωγός |
| | Skyddsledare | Suojajohdin | Conduttore di terra | Conductor de protección | Ochranný vodič | Condutor de terra | Αγωγός γείωσης |
| N | Neutralledare | Nollajohdin | Conduttore neutro | Conductor neutro | Neutrální vodič | Condutor neutro | Ουδέτερος αγωγός |

FittinQ B.V.

Smaragdweg 52, 5527 LB Hapert, The Netherlands
www.qazqa.nl

QAZQA