
ASSEMBLY


1. Open the package and find the below parts



2. Install the rods to stand.








ASSEMBLY

3. Insert the star topper to the top rod, then insert to the rod top. Extend and release the lights tree downward slowly and gently. Using 15 springs to hook the lights ring and stand at fifteen directions. Tighten the waterproof connector.

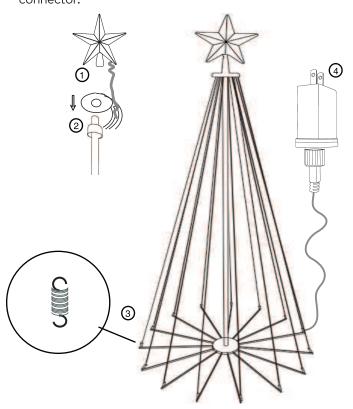

OPERATION

Specifications

	Color	RGB	
	Power supply	Adapter	
	Input voltage		
	Control method	APP Control / Control box	
	Working temperature	-20℃-50℃	



