

INSTALLATION INSTRUCTION

INFRARED CONTROLLER

TECHNICAL DATA:

Model	VT-2425
Output	2 Channels
Output Current	≤6A
Output Power	72V/144W
Supply Voltage	DC: 12V/24V



2 YEARS
WARRANTY*

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING


1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a certified person.



This marking indicates that this product should not be disposed of with other household wastes.








Caution, risk of electric shock.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

KEY FUNCTIONS ARE AS FOLLOWS :

 BRIGHTNESS +	 BRIGHTNESS -	 OFF	 ON
 COOL COLOR BRIGHTNESS +	 COOL COLOR BRIGHTNESS -	 WARM COLOR BRIGHTNESS +	 WARM COLOR BRIGHTNESS -
 THE SHORTCUT KEY OF CCT SELECTION: WHITE COLOR INDICATES THE HIGHER BRIGHTNESS OF COOL COLOR; YELLOW COLOR INDICATES THE HIGHER BRIGHTNES OF WARM COLOR			 FLASH MODE
			 FADE MODE
			 SPEED +
			 SPEED -

FLASH CHANGING MODE:

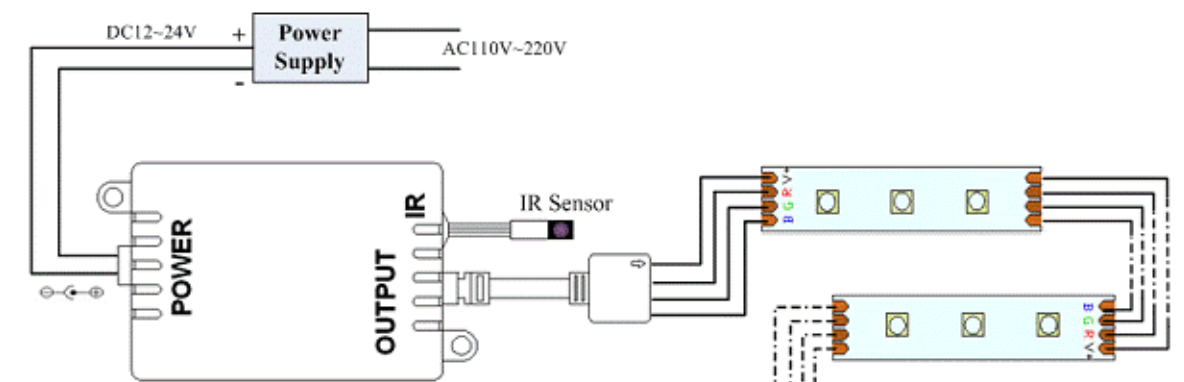
First press - Warm color flash; Second press- white color flash; Third press- double color flash;

FADE CHANGING MODE:

First press- Warm color fade; second press- white color fade; Third press-double color fade;

APPLICATION CONNECTION DIAGRAM:

Note: connect the strips first and then the power on; Make sure there is no short circuit before power on.



NOTES:

1. The power supply voltage of this product is DC12-24V and shall not be connected to other voltages;
2. The outgoing line shall be correctly wired according to the color and label provided in the wiring diagram;
3. This product should not be overloaded.

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST
DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B