
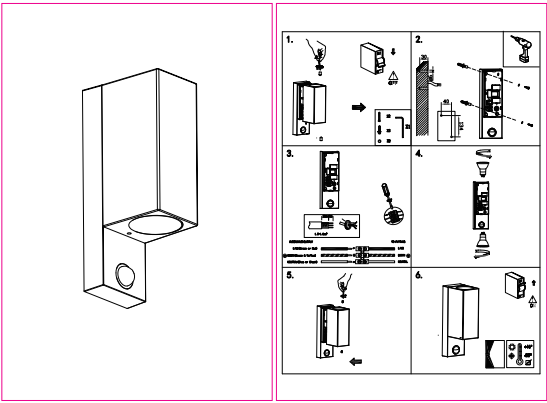


HOW TO CHARGE INTO PHOTOCELL MODE



CONTROL MODE

1. When power on, the PIR detector enters into the 'WAKE-UP' mode for about 10 seconds. Then automatically change into AUTO MODE.
2. Change the PHOTOCELL MODE when the sensor is 2m from the sensor. When the sensor is 2m from the sensor, the PIR detector will automatically change into PHOTOCELL MODE from AUTO MODE. It can be adjusted with LUX (adjusting the detection range in this mode must be more than 2000 Lux) and adjust to use each day. When it is not on.
3. During PHOTOCELL MODE or AUTO MODE, by adjusting the OFF mode with more than 3 seconds and then on again, the PIR detector will enter into 'WAKE-UP' mode. When the sensor is 2m from the sensor, the PIR detector will automatically change into PHOTOCELL MODE from AUTO MODE.