



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED TABLE LAMP




02 YEAR
WARRANTY*

TECHNICAL DATA

MODEL	VT-7506
SKU	10345, 10346
WATTS	5W
LUMENS	500 lm
COLOR TEMPERATURE	3000K
IP RATING	IP20
BEAM ANGLE	60°
MATERIAL	Iron
INPUT POWER	AC 200-240V, 50Hz
DIMENSION	Ø150x455 mm

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

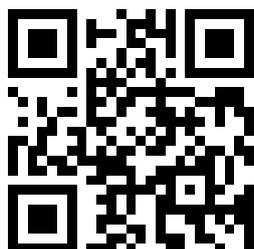

MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu
For More products range, inquiry please contact our distributor or nearest dealers.
V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B

INSTRUCTIONS FOR THE LIGHT

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. For Indoor Use only



This marking indicates that this product should not be disposed of with other household wastes.




Caution, Risk of electric shock



***This product contains a light source of energy efficiency class<F>, where <F> shall be replaced by the energy class of the contained light source.**

INSTALLATION DIAGRAM

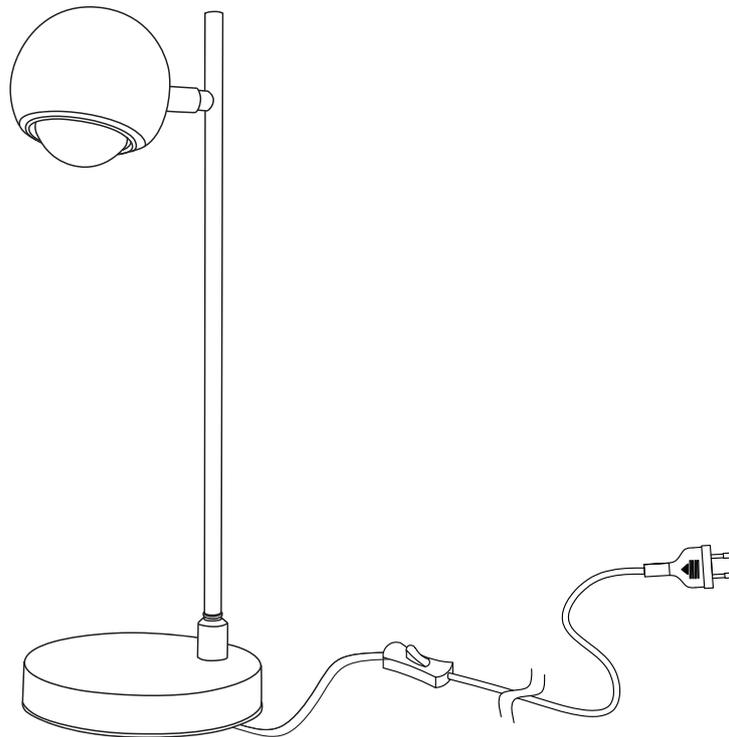

Note: This light is designed with adjustable height, press the pin on the canopy to adjust the height of the light.

RoHS



**UK
CA**



DIAGRAM FOR REPLACING THE LIGHT SOURCE

[BY PROFESSIONALS ONLY]








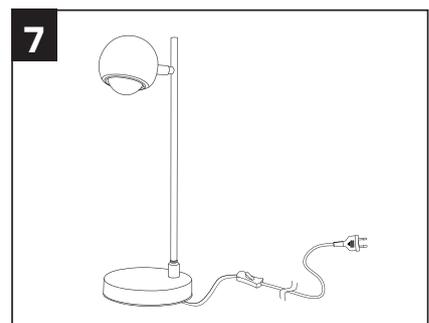


DIAGRAM FOR REPLACING CONTROL GEAR

[BY PROFESSIONALS ONLY]

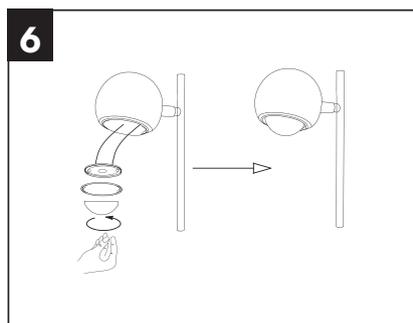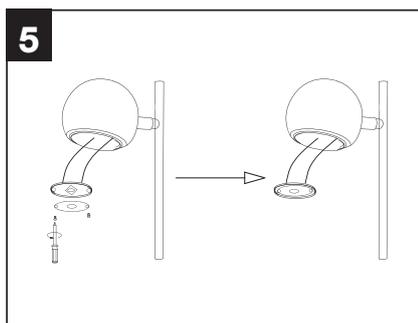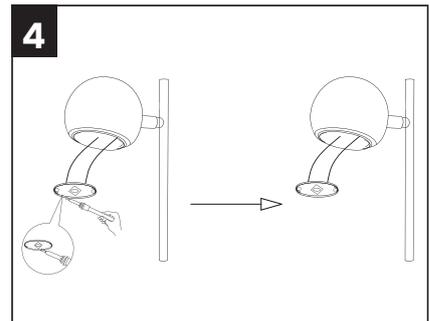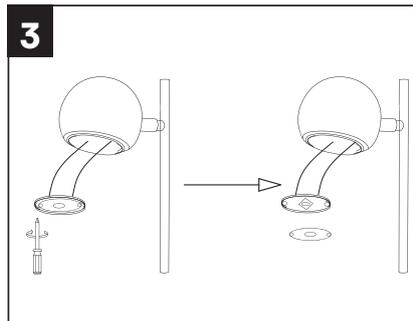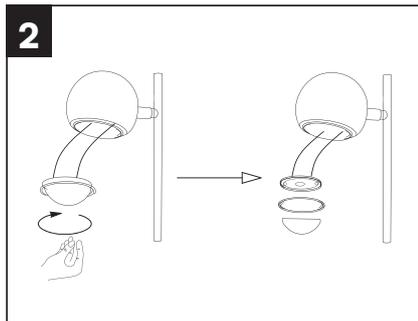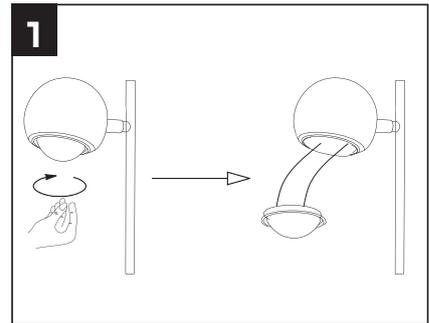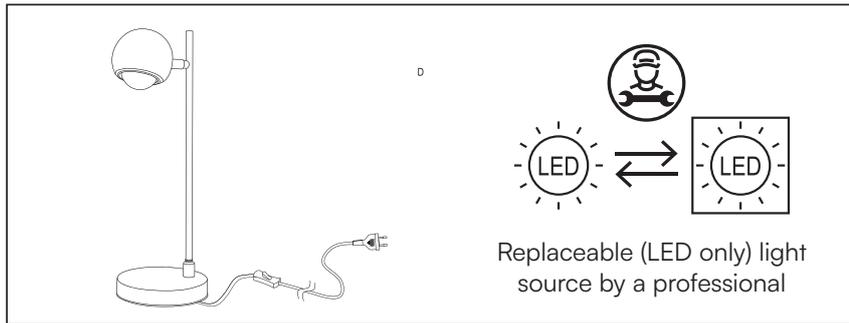